# Miniature Regulator ARJ1020F Series

- Compact and lightweight (16 g)
- Low cracking pressure 0.02 MPa Standard model equipped with backflow function



ARJ1020F-M5-04

ARJ1020F-M5-06



# Symbol

Note) A standard model is equipped with a backflow function. A main valve opens when the inlet pressure is released, and then an outlet pressure backflows into the inlet side.

### Standard Specifications

Model		ARJ1020F		
Port	IN side	M5 (Male thread)		
size	OUT side (Applicable tubing O.D.)	ø4	ø6	
Fluid		A	ir	
Proof pre	essure	1.2	MPa	
Maximun	n operating pressure	0.8 MPa		
		Standard: 0.1 to 0.7 MPa		
Regulatin	ng pressure range	0.2 MPa setting 0.05 to 0.2 MPa		
Ambient	and fluid temperature	-5 to 60°C (No freezing)		
Construc	tion	Relieving type		
Weight (F	(g)	0.015	0.016	
Cracking pressure (Valve)		0.02 MPa		
Max. effe	ctive area (OUT→IN)	1.8 mm <sup>2</sup>		
Applicable tubing material Note)		Nylon, Soft nylon, Polyurethane		


Note) Be sure to note the maximum operating pressure for soft nylon and polyurethane. (Refer to Best Pneumatics No. 7.)

### Accessory (Option)/Part No.

SMC


Description	Part no.	
Manifold base	ARJM10-4, -6, -10	


### How to Order

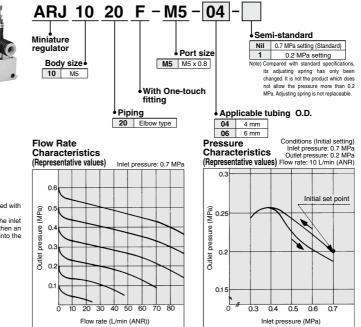

### Miniature Regulator ARJ1020F Series

### Construction/Dimensions





F



Dimensions

No.	Description	Material	Note
1	Body	PBT	
2	Valve guide	Brass	Electroless nickel plated
3	Piston	Polyacetal	
4	Bonnet	Brass	Electroless nickel plated
5	Knob	Brass	Electroless nickel plated
6	Adjusting spring	Steel wire	Zinc chromated
7	Valve	Brass	Rubber lining
10	Nipple	Brass	Electroless nickel plated

	Booonpaon	iviatoriai	i artino.
7	Valve	Brass, HNBR	13434-30#1
8	Gasket	Stainless steel NBR	M-5G2
9	Spring	Stainless steel	134313

**Replacement Parts** 

No Description Material

Panel mounting hole

Max. 2.5t

Part no


\* When replacing valves and springs, remove nipple first. Note that adhesive is applied to the nipple portion.


Dimensions										
Model	Α	В	С	D	E	F	G	н	J	К
ARJ1020F-M5-04	21	10.4	4	M5 x 0.8	6	10.6 (Width across	3.5	15.5	50	17.0
ARJ1020F-M5-06	22	12.8	6	0.0 X CIVI	0	flats: 10)	3.5	15.5	50	17.2


### Manifold Base (Option)/Dimensions

66.5

33







Manifold base part no.	Stations	A dimension	B dimension
ARJM10-4	4	90	82
ARJM10-6	6	130	122
ARJM10-10	10	210	202

∕⊘SMC

A Precautions						
Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 387 to 391 for Precautions on every series.						
Piping						
∆Warning						
1. To connect the IN side, hold the valv						

/e guide at its wrench flats (opposite side 10) and tighten it at the recommended torque of 1.0 to 1.5 N·m. (The recommended torque when using a tightening tool to tighten an additional 1/6 to 1/4 turn after tightening by hand) Excessive torque or holding it at an

area other than the specified portion may result in a malfunction. 2. While piping to products or operating

the knob, ensure that an excess bending moment should not be applied to a product, because it may result in damage.

### Mounting/Adjustment

### **∆**Warning

1. Set up the regulator while verifying the pressure that is indicated on the inlet and the outlet pressure gauges. Turning the knob excessively could damage the internal parts.

### 

1. Release the lock to adjust the pressure. After the adjustment, engage the lock. Failure to observe this procedure could damage the knob or cause the outlet pressure to fluctuate. <Lock operating method> Loosen the lock nut to unlock it, and

tighten it to lock it.

2. This product can be used as a check regulator by installing it between solenoid valve and actuator.

### Selection

### **∧**Caution

1. When operating at an inlet pressure lower than the inlet pressure used in the flow rate characteristics graph, the pressure drop on the outlet side may be greater. Therefore, be sure to conduct testing using the actual equipment.

For pressure control equipment selection, refer to page 123 in the "Product Selection Guide."

ARJ I AR425 . 1 to 935 ARX AMR ARM ARP IR⊡-A IR IRV VEX SRH SRP SRF ITV IC ITVH ITVX PVQ VY1 VBA VBAT AP100

-

# **Miniature Regulator** ARJ210 Series

- Lightweight body made of aluminum (60 g)
- Two types of piping connections provided for the IN side: 1/8 (male thread) and M5 (female thread)



AB.1210-M5

### ARJ210-M5BG

Symbol




### Standard Specifications

Model		ARJ210-M5		
Port size	IN side	1/8 (Male thread), M5 x 0.8 (Female thread)		
Port size	OUT side	M5 x 0.8 (Female thread 2 pcs.)		
Fluid		Air		
Proof pressure Maximum operating pressure Regulating pressure range		1.2 MPa		
		0.8 MPa		
		Standard: 0.2 to 0.7 MPa		
		0.2 MPa setting 0.05 to 0.2 MPa		
Pressure gauge port size		M5 x 0.8 (Female thread)		
Ambient and fluid temperature		-5 to 60°C (No freezing)		
Construction		Relieving type		
Weight (kg)		0.06		

### Accessory (Option)/Part No.

Bracket	134856		
Pressure gauge Note)	G27-10-R1		
Note) When ordering the pressure gauge, a socket assembly (134828A) is required.			

When installing a pressure gauge, the socket assembly must be fixed and installed to prevent the thread from breaking. 0.2 MPa specification is not available for G27.

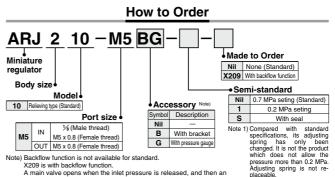


A main valve opens when the inlet pressure is released, and then an outlet pressure backflows into the inlet side.


X209 is a product with pressure gauge (G27-10-M-X202). The symbol "G" for accessory is not necessary.


### Flow Rate

### Characteristics (Representative values)




**SMC** 





## Miniature Regulator **ARJ210** Series

### Construction/Dimensions

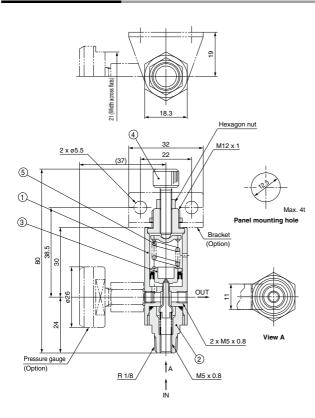

No.	Description	Material	Note		
1	Body	Aluminum alloy	Black anodized		
2	Valve guide	Brass	Electroless nickel plated		
3	Piston	POM			
4	Adjusting screw	Iron	Nickel plated		
5	Adjusting spring	Steel wire	Zinc chromated		

### Precautions Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and ARJ pages 387 to 391 for Precautions on every series. AR425 to 935 Selection ARX **∆**Warning 1. This product cannot be used as a check regulator by installing it between solenoid valve and actuator. Doing so could lead to AMR equipment damage. ARM When piping, tighten the regulator with the recommended proper tightening torque shown in the table below while holding the ARP whench flats (width 11) of the valve guide for IN port and holding the hexagonal sec-tion of the body for the OUT port. Excessive torque or holding it other than at the speci-fied area could lead to equipment damage. IR -A IR 3. While piping to products or operating the knob, ensure that an excessbending moment should not be applied to a product, IRV because it may result in damage. Recommended proper torque VEX Connection Recommended Note thread proper torque [N-m The recommended torque when using SRH M5 a tightening tool to tighten an additional 1.0 to 1.5 1/6 to 1/4 turn after tightening by hand SRP R1/8 7 to 9 SRF When operating at an inlet pressure lower than the inlet pressure used in the flow ITV rate characteristics graph, the pressure drop on the outlet side may be greater. Therefore, be sure to conduct testing us-IC ing the actual equipment. For pressure control equipment selection, refer to page 123 in the "Product Selection ITVH Guide. Mounting/Adjustment ITVX **∆**Warning PVQ Set up the regulator while verifying the pressure that is indicated on the inlet and the outlet pressure gauges. Turning the knob excessively could damage the internal parts. VY1 VBA VBAT 1. Release the lock to adjust the pressure. After the adjustment, engage the lock. Failure to observe this procedure could AP100 damage the knob or cause the outlet pressure to fluctuate. <Lock operating method> Loosen the lock nut to unlock it, and tighten it to lock it. 2. This product cannot be used as a check regulator by installing it between solenoid valve and actuator. (Except X209) 3. Port with a pressure gauge or a plug can be used as an OUT port.

### Maintenance

### **∆**Warning

1.

1. Make sure to perform a periodic inspection of the pressure gauge when the miniature regulator is installed between a solenoid valve and an actuator. Sudden pressure changes could happen and the durability of the product could be reduced. Using an electronic type pressure gauge is recommended, depending on the situation.