


Compact Rotary Actuator

CRQ2 Series

Rack & Pinion Type/Size: 10, 15, 20, 30, 40

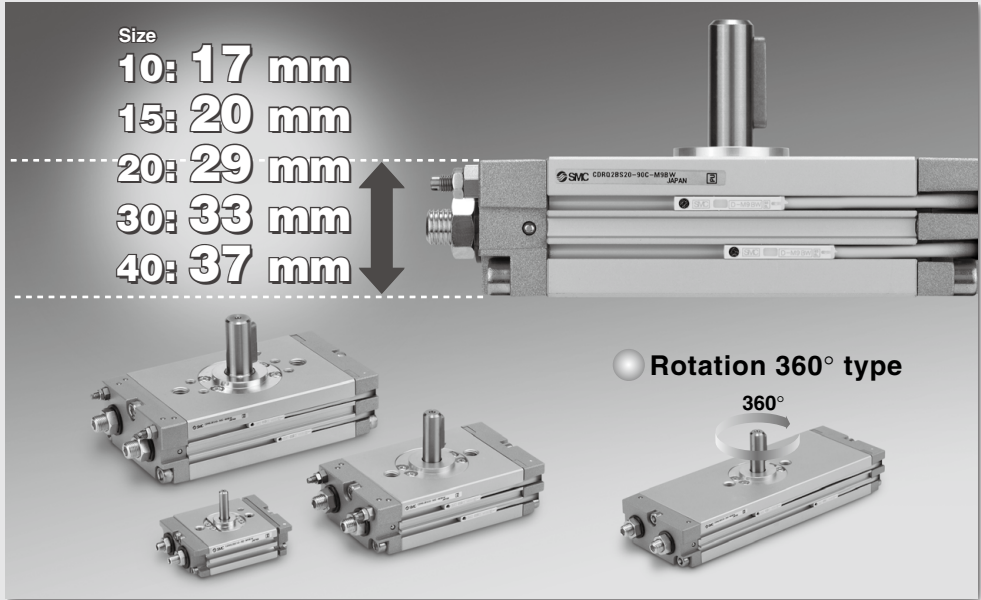

- CRB□2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2
- MSQ
- MSZ
- CRQ2X
MSQX
- MRQ

Series Variations

		Size					Page
		10	15	20	30	40	
Standard	Rotating angle	80° to 100°	●	●	●	●	●
		170° to 190° 350° to 370°	●	●	●	●	●
	Shaft type	Single shaft S	●	●	●	●	●
		Double shaft W	●	●	●	●	●
	Cushion	None			●	●	●
Rubber cushion		●	●				
Air cushion				●	●	●	
Variations	With auto switch	●	●	●	●	●	
	Copper-free (Standard) 20-	●	●	●	●	●	
Made to Order	Shaft type	Single shaft with four chamfers X			●	●	●
		Double shaft key Y			●	●	●
		Double shaft with four chamfers Z			●	●	●
		Single round shaft T	●	●	●	●	●
		Double shaft (Without long shaft key) J			●	●	●
		Double round shaft K	●	●	●	●	●
Pattern	Shaft end form	●	●	●	●	●	
	Rotating range	●	●	●	●	●	
Shaft and parallel key stainless steel spec. -X6				●	●	●	

D-□

Compact Rotary Actuator

Rack & Pinion Type/Size: 10, 15, 20, 30, 40

Built-in cushion

10, 15 : Rubber bumper
20, 30, 40: Air cushion

Equipped with an angle adjusting mechanism ($\pm 5^\circ$)

Rotary actuator body serves as a flange.

360° type

360°

Piping can be installed from one end.

CRQ2 Series

2 auto switches are mountable on the same side.
(Mountable on the both sides.)


Mounting smaller auto switches prevents the auto switch from protruding from the body edge and realizes space-savings.

Double piston type
Compact, with no backlash

Both single shaft and double shaft are available in all sizes.


360° type application example

Complete external inspection of a work piece

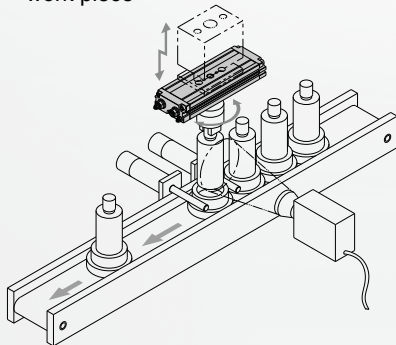

Centering is easy when mounting the main body.

Pin hole for positioning the main body

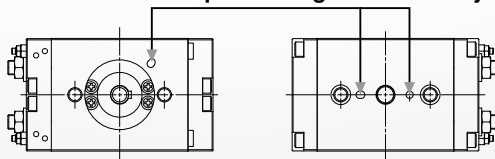

Size	Shaft type	Rotating angle	Cushion	
			Rubber	Air
10	• Single • Double	• 80° to 100°	●	—
15			●	—
20		—	●	
30		—	●	
40		—	●	

Compact Rotary Actuator Rack & Pinion Type **CRQ2 Series**

How to Order

Without auto switch

CRQ2B S [] [] **20** [] [] — **90** [] []

With auto switch

CDRQ2B S [] [] **20** [] [] — **90** [] [] — **M9BW** [] []

Built-in magnet

Shaft type

S	Single shaft
W	Double shaft

* Refer to pages 243 and 244 for the shaft type variations.

Pattern

Nil	Standard
P	Combination of simple specials and Made to Order

* Refer to pages 246 to 260 for details.

Size

10
15
20
30
40

Port type

Size	Port type	
10, 15	Nil	M5
	TF	G 1/8
20, 30, 40	TN	NPT 1/8
	TT	NPTF 1/8

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	n pcs.

Auto switch

Nil Without auto switch (Built-in magnet)

* For the applicable auto switch model, refer to the table below.

Suffix symbol

Symbol	Cushion	Size				
		10	15	20	30	40
Nil	Without cushion	—	—	●	●	●
	Rubber bumper	●	●	—	—	—
C	Air cushion	—	—	●	●	●

Made to Order

Refer to page 236 for details.

Rotating angle

90	80° to 100°
180	170° to 190°
360	350° to 370°

Applicable Auto Switches

Refer to pages 797 to 850 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC	Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)	IC circuit		Relay, PLC		
																24 V	5 V, 12 V
Solid state auto switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	M9PV	M9P	●	●	○	○	—	IC circuit	Relay, PLC	
				3-wire (PNP)				M9BV	M9B	●	●	○	○				
				2-wire	M9NVV	M9NW	●	●	○	○	—	IC circuit					
	3-wire (NPN)			M9PVV	M9PV	●	●	○	○	—	IC circuit						
	3-wire (PNP)			M9BVV	M9BV	●	●	○	○	—	IC circuit						
	2-wire			M9NAV ^{*1}	M9NA ^{*1}	○	○	●	●	○	○	—					
Reed auto switch	—	Grommet	Yes	3-wire (NPN equiv.)	24 V	12 V	—	A96V	A96	●	—	—	—	—	—	IC circuit	Relay, PLC
				2-wire				A93V ^{*2}	A93	●	●	●	—	—	—	—	
					A90V	A90	●	—	—	—	—	—	—	—	IC circuit		
							○	○	○	○	○	○	○	○	○	○	

*1 Although it is possible to mount water resistant type auto switches, note that the rotary actuator itself is not of water resistant construction.


*2 1 m type lead wire is only applicable to D-A93.

* Lead wire length symbols: 0.5 m Nil (Example) M9NV
1 m M (Example) M9NVW
3 m L (Example) M9NWL
5 m Z (Example) M9NwZ

* Auto switches marked with "○" are made to order specification.

* Refer to pages 837 and 838 for the details of solid state auto switch with pre-wired connector.

* Auto switches are shipped together, (but not assembled).



Symbol



Made to Order

Refer to pages 246 to 260 for details.

Symbol	Specifications/Content	Applicable shaft type
—	Shaft type variation	X, Y, Z, T, J, K
XA1 to XA24	Shaft pattern sequencing I	S, W
XA31 to XA59	Shaft pattern sequencing II	X, Y, Z, T, J, K
XC7	Reversed shaft	S, W, X, T, J
XC8 to XC11	Change of rotating range	S, W, Y X*, Z*, T*, J*, K*
XC12 to XC15	Change of angle adjustable range (0° to 100°)	
XC16, XC17	Change of angle adjustable range (90° to 190°)	
XC18, XC19	Change of rotating range	
XC20, XC21	Change of angle adjustable range (90° to 190°)	S, W, X, Y, Z, T, J, K
XC22	Without inner rubber bumper	
XC30	Fluorine grease	
XC69	Fluororubber seal	
X6	Shaft and parallel key made of stainless steel	

* Among the symbols XC8 to XC21, only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Moisture Control Tube IDK Series



When operating an actuator with a small diameter and a short stroke at a high frequency, the dew condensation (water droplet) may occur inside the piping depending on the conditions.

Simply connecting the moisture control tube to the actuator will prevent dew condensation from occurring. For details, refer to [the IDK Series in the Best Pneumatics No.6](#).

Specifications

Size	10	15	20	30	40
Fluid	Air (Non-lube)				
Max. operating pressure	0.7 MPa		1.0 MPa		
Min. operating pressure	0.15 MPa		0.1 MPa		
Ambient and fluid temperature	0° to 60°C (No freezing)				
Cushion	Rubber bumper		Not attached, Air cushion		
Angle adjustment range	Rotation end ±5°				
Rotation	90°, 180°, 360°				
Port size	M5 x 0.8		Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8		
Output (N·m)*	0.3	0.75	1.8	3.1	5.3

* Output under the operating pressure at 0.5 MPa. Refer to page 32 for further information.

Allowable Kinetic Energy and Rotation Time Adjustment Range

Size	Allowable kinetic energy				Stable operational rotation time adjustment range
	Allowable kinetic energy (J)			Cushion angle	
	Without cushion	Rubber bumper	With air cushion*		Rotation time (s/90°)
10	—	0.00025	—	—	0.2 to 0.7
15	—	0.00039	—	—	0.2 to 0.7
20	0.025	—	0.12	40°	0.2 to 1
30	0.048	—	0.25	40°	0.2 to 1
40	0.081	—	0.4	40°	0.2 to 1

* Allowable kinetic energy for the bumper equipped type

Maximum absorbed energy under proper adjustment of the cushion needles.

If operated where the kinetic energy exceeds the allowable value, this may cause damage to the internal parts and result in product failure. Please pay special attention to the kinetic energy levels when designing, adjusting and during operation to avoid exceeding the allowable limit.

Weight

Size	Standard weight* (g)		
	90°	180°	360°
10	120	150	200
15	220	270	380
20	600	700	1000
30	900	1100	1510
40	1400	1600	2280

* Excluding the weight of auto switch.

⚠ Precautions


Be sure to read this before handling the products.
Refer to back page 50 for Safety Instructions and pages 4 to 14 for Rotary Actuator and Auto Switch Precautions.

⚠ Caution


(1) The angle adjusting screw (angle adjustment bolt) is set at random near the maximum rotating angle. Therefore, it must be readjusted to obtain the angle that suits your application.

Construction

Basic type Size 10/15

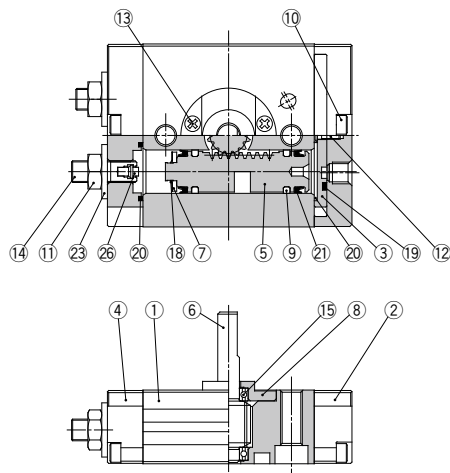

Basic type Size 20/30/40

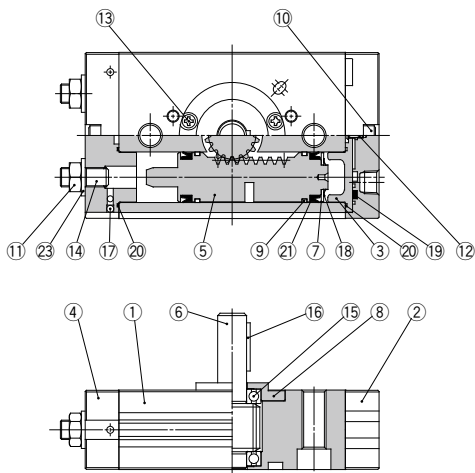

CRB□2
CRB1
MSU
CRJ
CRA1
CRQ2
MSQ
MSZ
CRQ2X
MSQX
MRQ

Component Parts

No.	Description	Material	Note
1	Body	Aluminum alloy	Anodized
2	Cover	Aluminum alloy	Chromated, painted
3	Plate	Aluminum alloy	Chromated
4	End cover	Aluminum alloy	Chromated, painted
5	Piston	Stainless steel	
6	Shaft	Stainless steel Chrome molybdenum steel	Size: 10, 15 Size: 20, 30, 40
7	Seal retainer	Aluminum alloy	Chromated
8	Bearing retainer	Aluminum alloy	Chromated
9	Wearing	Resin	
10	Hexagon socket head cap screw	Stainless steel	
11	Hexagon nut	Steel wire	Size: 10, 15
	Small hexagon nut	Steel wire	Size: 20, 30, 40
12	Cross recessed No. 0 screw	Steel wire	
	Cross recessed No. 0 screw	Steel wire	Size: 10, 15
13	Cross recessed screw	Steel wire	Size: 20, 30, 40

Component Parts

No.	Description	Material	Note
14	Hexagon socket head set screw	Chrome molybdenum steel	
15	Bearing	Bearing steel	
16	Parallel key	Carbon steel	Size: 20, 30, 40 only
17	Steel ball	Stainless steel	Size: 20, 30, 40 only
18	Type CS retaining ring	Stainless steel	
19	Seal	NBR	
20	Gasket	NBR	
21	Piston seal	NBR	
22	Cushion seal	Rubber material	Size: 20, 30, 40 only with cushion
23	Seal washer	NBR	
24	Magnet	—	With auto switch only
25	Cushion valve assembly		Size: 20, 30, 40 with cushion only
26	Cushion pad	Rubber material	Size: 10, 15

Replacement Parts

Description	Part no.				
	10	15	20	30	40
Seal kit	P473010-1	P473020-1	P473030-1	P473040-1	P473050-1

A grease pack (10 g) is included. When you need a grease pack only, order with the following part number.

Grease pack part no: GR-S-010 (10g)

Applicable parts	No.	Description	Qty.	Note
		19	Seal	1
		Gasket for cover	2	
	20	Gasket for endcover	1	Size: 10, 15
		Gasket	4	Size: 20, 30, 40
	21	Piston seal	4	
	23	Seal washer	2	



* A set includes all parts above.

* Individual part cannot be shipped.



CRQ2 Series

Construction



With auto switch
Size 10/15

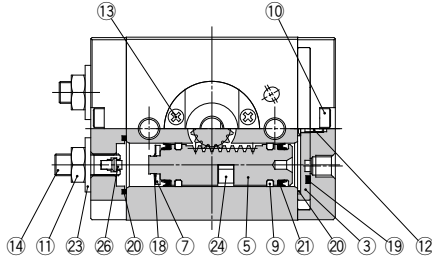



With auto switch
Size 20/30/40

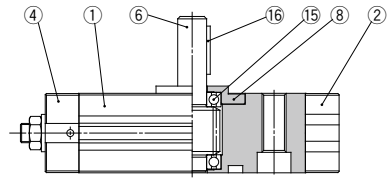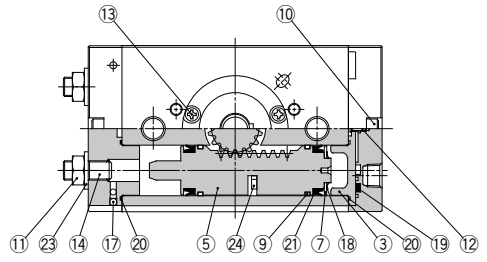

With cushion
Size 20/30/40

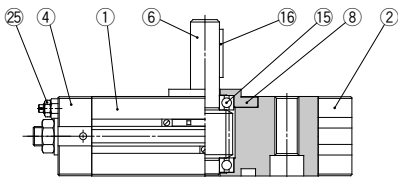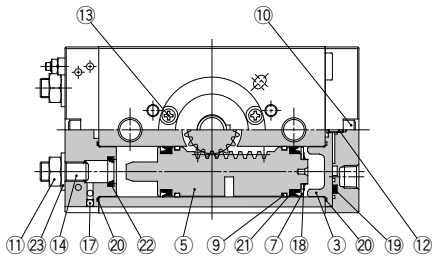




With auto switch and cushion
Size 20/30/40

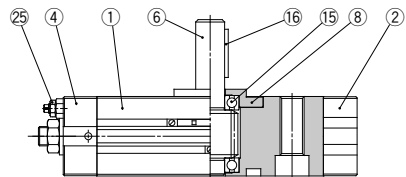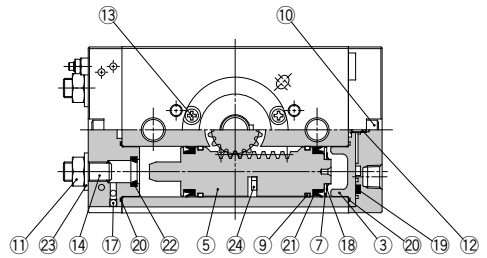

Compact Rotary Actuator Rack & Pinion Type **CRQ2 Series**

Dimensions

Size 10/15

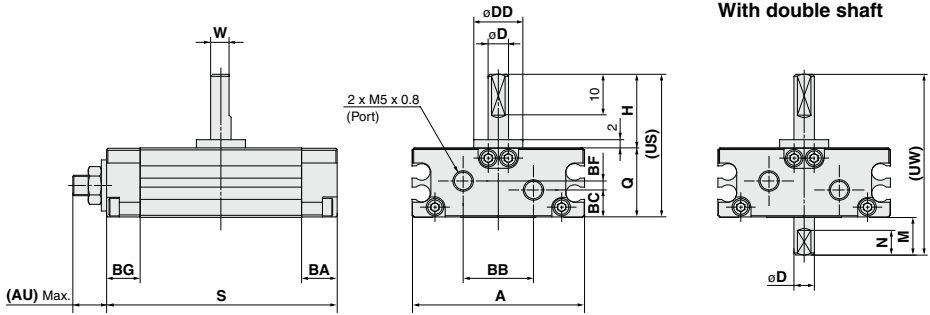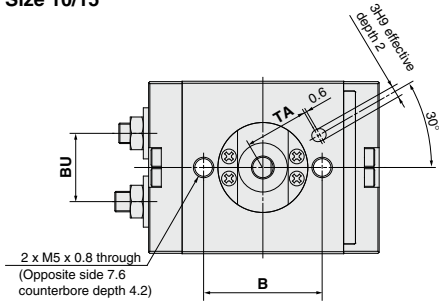

- CRB□2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2**
- MSQ
- MSZ
- CRQ2X
- MSQX
- MRQ

(mm)

Size	Rotating angle	A	AU*	B	BA	BB	BC	BF	BG	BU	D (g6)	DD (h9)	H
10	90°, 180°, 360°	42.4	(8.5)	29	8.7	17.2	6.7	2.2	8.2	16.7	5	12	18
15	90°, 180°, 360°	53.6	(9.5)	31	9.2	26.4	10.6	—	9	23.1	6	14	20

Size	Rotating angle	W	Q	S	US	UW	N	M	TA	TC	TD
10	90°	4.5	17	56.4	35	44	6	9	15.5	8	15.4
	180°			68.9							
	360°			96.9							
15	90°	5.5	20	65.2	40	50	7	10	16	9	17.6
	180°			82.2							
	360°			116.2							

* AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts.

S: Upper 90°, Middle 180°, Lower 360°




D-□

CRQ2 Series



Dimensions

Size 20/30/40

These parts are not attached when a model without air cushion is selected.

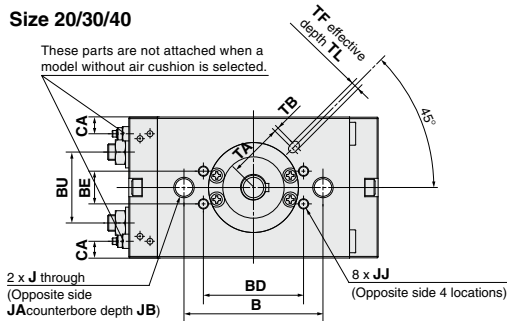

With double shaft



Size	Rotating angle	A	AU*	B	BA	BB	BC	BD	BE	BU	CA	CB	D (g6)	DD (h9)	F	H	J	JA	JB
20	90°, 180°, 360°	63	(11)	50	14	34	14.5	—	—	30.4	7	5	10	25	2.5	30	M 8 x 1.25	11	6.5
30	90°, 180°, 360°	69	(11)	68	14	39	16.5	49	16	34.7	8.1	5.3	12	30	3	32	M10 x 1.5	14	8.5
40	90°, 180°, 360°	78	(13)	76	16	47	18.5	55	16	40.4	8.3	5.5	15	32	3	36	M10 x 1.5	14	8.6

Size	Rotating angle	JJ	K	Q	S	W	Key dimensions		US	TA	TB	TC	TD	TF (H9)	TG (H9)	TL	UW	G	M	N	L
							b	L1													
20	90°	—	3	29	104.4	11.5	4 ⁰ _{-0.03}	20	59	24.5	1	13.5	27	4	4	2.5	74	8 ⁰ _{-0.1}	15	11	9.6 ⁰ _{-0.1}
	180°				129.5																
	360°				179.8																
30	90°	M5 x 0.8 depth 6	4	33	122	13.5	4 ⁰ _{-0.03}	20	65	27	2	19	36	4	4	2.5	83	10 ⁰ _{-0.1}	18	13	11.4 ⁰ _{-0.1}
	180°				153																
	360°				216																
40	90°	M6 x 1 depth 7	5	37	139.3	17	5 ⁰ _{-0.03}	25	73	32.5	2	20	39.5	5	5	3.5	93	11 ⁰ _{-0.1}	20	15	14 ⁰ _{-0.1}
	180°				177																
	360°				253																

* AU dimension is not the dimension at the time of shipment, since its dimension is for adjustment parts.


** In addition to Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8 are also available.

S: Upper 90°, Middle 180°, Lower 360°


Rotation Range

When pressurized from the port indicated by the arrow, the shaft will rotate in a clockwise direction.


Rotating angle: 90°



Rotating angle: 180°

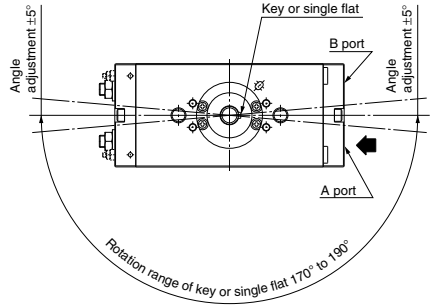

Rotating angle: 360°

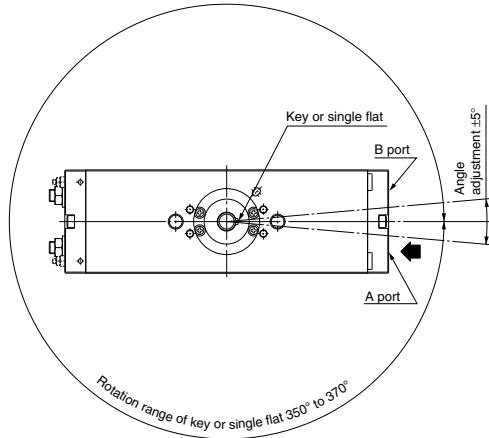

CRB□2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX


MRQ

D-□

CRQ2 Series


Unit Used as Flange Mount

The L dimensions of this unit are shown in the table below. When hexagon socket head cap bolt of the JIS standard is used, the head of the bolt will recess into the groove of actuator.



Size	L	Screw
10	13	M4
15	16	M4
20	22.5	M6
30	24.5	M8
40	28.5	M8

Auto Switch Proper Mounting Position at Rotation End

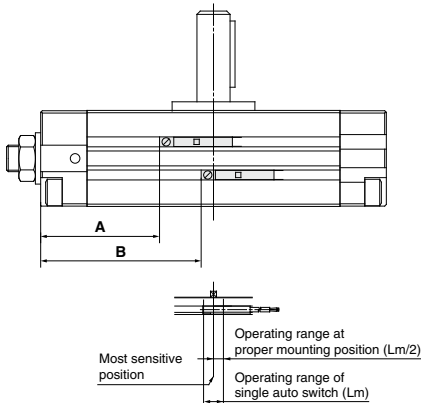

Size	Rotating angle	Solid state switch				Reed switch			
		A	B	Operating angle (θ m)	Hysteresis angle	A	B	Operating angle (θ m)	Hysteresis angle
10	90°	19	25.5	61°	5°	15	21.5	63°	12°
	180°	22	35			18	31		
	360°	29	56.5			25	52.5		
15	90°	22.5	31	47°	4°	18.5	27	52°	9°
	180°	26.5	43.5			22.5	39.5		
	360°	34.5	68.5			30.5	64.5		
20	90°	40	52.5	40°	4°	36	48.5	41°	9°
	180°	46	71.5			42	67.5		
	360°	59.5	110			55.5	106		
30	90°	47	63	29°	2°	43	59	32°	7°
	180°	55	86			51	82		
	360°	66	129.5			62	125.5		
40	90°	54	73	24°	2°	50	69	24°	5°
	180°	63.5	101.5			59.5	97.5		
	360°	76.5	156			72.5	152		

Operating angle θ m: The value of the individual switch's movement range Lm as represented by an angle.

Hysteresis angle: Value of the switch's hysteresis as represented by an angle.

Note) Since the above values are only provided as a guideline, they are not guaranteed. In the actual setting, adjust them after confirming the auto switch performance.

1 Shaft Type Variation, Four Chamfers (Size 20/30/40)

Shaft Type: X, Z

C RQ2B
CDRQ2B

Shaft type — Size — Rotating angle

Refer to "How to Order" on page 235 for further information.



Shaft type

X	Single shaft with four chamfers
Z	Double shaft with four chamfers

Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Single w/ four chamfers (X), Double w/ four chamfers (Z)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotation	80° to 100°, 170° to 190°, 350° to 370°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

Dimensions

Shaft type	X				Z			
Form								
	Size	D (g6)	G	H	N	UX	UZ	M
	20	10	8 ⁺⁰ _{-0.1}	21	11	50	65	15
	30	12	10 ⁺⁰ _{-0.1}	24	13	57	75	18
	40	15	11 ⁺⁰ _{-0.1}	27	15	64	84	20

Note) Dimension parts different from the standard conform to the general tolerance.

2 Shaft Type Variation, Double Shaft With Key (Size 20/30/40)

Shaft Type: Y

C RQ2B
CDRQ2B


Y — Size — Rotating angle

Refer to "How to Order" on page 235 for further information.

Shaft type

Y	Double shaft with key
---	-----------------------

Dimensions

Y					
	Size	D (g6)	W	H	UY
	20	10	11.5	30	89
	30	12	13.5	32	97
	40	15	17	36	109

Note) Dimension parts different from the standard conform to the general tolerance.

Specifications

Fluid	Air (Non-lube)
Applicable shaft type	Double shaft with key (Y)
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotating angle	80° to 100°, 170° to 190°, 350° to 370°
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable

3 Shaft Type Variation/Without Keyway

Shaft Type: T, J, K

C RQ2B Shaft type Size — Rotating angle
CDRQ2B

• Shaft type
• Refer to "How to Order" on page 235 for further information.

T	Single round shaft
J	Double shaft (Without long shaft key, with four chamfers on short shaft, one chamfer on short shaft for 10 and 15.)
K	Double round shaft

Specifications

Fluid	Air (Non-lube)	
Applicable shaft type	Single round shaft (T), Double shaft (J), Double round shaft (K)	
Applicable size	10, 15	20, 30, 40
Max. operating pressure	0.7 MPa	1.0 MPa
Min. operating pressure	0.15 MPa	0.1 MPa
Cushion	Rubber bumper	Not attached, Air cushion
Rotating angle	80° to 100°, 170° to 190°, 350° to 370°	
Port size	M5 x 0.8	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable	

Dimensions

Shaft type	T				J				K	
Form					Size 20, 30, 40 					
					Size 10, 15 					
Size	D (g6)	G	W	H	M	N	UT	UJ	UK	
10	5	—	4.5	18	9	6	35	44	53	
15	6	—	5.5	20	10	7	40	50	60	
20	10	8 ⁰ _{-0.1}	—	30	15	11	59	74	89	
30	12	10 ⁰ _{-0.1}	—	32	18	13	65	83	97	
40	15	11 ⁰ _{-0.1}	—	36	20	15	73	93	109	

Note) Dimension parts different from the standard conform to the general tolerance.

CRB□2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

D-□

CRQ2 Series (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA1 to -XA24: Shaft Pattern Sequencing I

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter.)
Please contact SMC for a specification sheet when placing an order.

Symbol

-XA1 to XA24

Shaft Pattern Sequencing I

Applicable shaft type: S, W

How to Order

C D RQ2B S P 20 90 C M9BW X A2 A24 C30 -X6

Built-in magnet

Nil	None
D	Built-in magnet

Shaft type

S	Single shaft
W	Double shaft

Pattern

Thread type

Size	Port type
10, 15	Nil
	M5
	Rc 1/8
20, 30, 40	Nil
	G 1/8
	NPT 1/8
	TF
	TN
	TT
	NPTF 1/8

How to order model with auto switches

Refer to page 235 for "How to Order" products with auto switch.

Size

10
15
20
30
40

Auto switch

Refer to page 235 for the part no. of auto switches.

Air cushion

Size	Air cushion	
	None	Attached
10, 15	—	
20, 30, 40	Nil	C

Rotating angle

90°	80° to 100°
180°	170° to 190°
360°	350° to 370°

Symbol for simple special, Made-to-Order products

- When the number of combinations is 1 or 2, refer to chart 1 and 2.
- Combination of XA is possible for up to 2 types.
- Combination of -X6 (Shaft, parallel stainless spec) is available with all the types.

Combination 3 Types

A 1	A24	C30
A 2	A24-X	6
A13	C 8	C30
A14	C30-X	6

Combination of Applicable Chart

Chart 1, 2
Chart 1
Chart 2, 5
Chart 2

Combination is available only when all the conditions are fulfilled among the combination chart above.

Combination 4 Types

A 1	A 2	C 8	C30
A 2	A24	C10-X	6
A14	C11	C30-X	6
A14	C 7	C12	C30

Combination of Applicable Chart

Chart 1, 2, 5
Chart 1, 2
Chart 2, 5
Chart 2, 5

Combination is available only when all the conditions are fulfilled among the combination chart above.

Combination of simple specials and Made-to-Order, it is possible for up to 4 types.

Combination Chart of Simple Specials for Tip End Shape

Chart 1. Combination between -XA□ and -XA□ (S, W shaft)

Symbol	Description	Top port		Shaft type	Applicable size	Combination
		Upper	Lower			
XA 1	Female thread at the end	●	—	S	10, 15	XA 1
XA 2	Female thread at the end	—	●	W	20, 30, 40	XA 1, XA 2
XA 3	Tip end of male thread	—	—	—	—	XA 1, XA 2, XA 3
XA 4	Tip end of male thread	—	—	—	—	W*, W*, XA 4
XA 5	Stepped round shaft	—	—	—	—	W*, W*, XA 4, XA 5
XA 6	Stepped round shaft	—	—	—	—	W*, W*, XA 4, XA 5, XA 6
XA 7	Round shaft with steps and male thread	—	—	—	10, 15	W*, W*, XA 4, XA 5, XA 6, XA 7
XA 8	Round shaft with steps and male thread	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8
XA 9	Change of the length of standard chamfered face	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9
XA10	Change of the length of standard chamfered face	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10
XA11	Two-sided chamfer	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11
XA12	Two-sided chamfer	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12
XA13	Shaft through-hole	—	—	—	10, 15	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13
XA14	Shaft through-hole and female thread	—	—	—	20, 30, 40	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14
XA15	Shaft through-hole and female thread	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15
XA16	Shaft through-hole and female thread	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16
XA17	Shortened shaft	—	—	—	10, 15	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17
XA18	Shortened shaft	—	—	—	10, 15, 20, 30, 40	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18
XA19	Shortened shaft	—	—	—	10, 15	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19
XA20	Reversed shaft	—	—	—	10, 15, 20, 30, 40	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19, XA20
XA21	Stepped round shaft with double-sided chamfer	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19, XA20, XA21
XA22	Stepped round shaft with double-sided chamfer	—	—	—	10, 15	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19, XA20, XA21, XA22
XA23	Right-angle chamfer	—	—	—	—	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19, XA20, XA21, XA22, XA23
XA24	Double key	—	—	—	20, 30, 40	W*, W*, XA 4, XA 5, XA 6, XA 7, XA 8, XA 9, XA10, XA11, XA12, XA13, XA14, XA15, XA16, XA17, XA18, XA19, XA20, XA21, XA22, XA23, XA24

Combination Chart of Made to Order

Chart 2. Combination between -XA□ and -XC□ (Made to Order/ Details of -XC□, refer to page 256.)

Symbol	Description	Applicable size	Combination	
			XA1 to XA24	
XC 7	Reversed shaft	10, 15, 20, 30, 40	—	XC18
XC 8	Change of rotating range		●	XC19
XC 9			●	XC20
XC10			●	XC21
XC11			●	XC22
XC12	Change in angle adjustable range 0° to 100°		●	XC30
XC13			●	XC69
XC14			●	
XC15	Change in angle adjustable range 90° to 190°		●	
XC16		●		
XC17		●		

* Chart 5. Refer to page 256 for combination available between -XC□ and -XC□.

Shaft Pattern Sequencing I


Symbol
-XA1 to XA8

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the portion of the diagram.
6. XA1 to XA24 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: **A1**


Machine female threads into the long shaft.
The maximum dimension L1 is, as a rule, twice the thread size (Example) For M3: L1 = 6
• Applicable shaft types: S, W



Size	Q1
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: **A2**


Machine female threads into the short shaft.
The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8
• Applicable shaft types: S, W



Size	Q2
10	M3
15	M3, M4
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: **A3**


The long shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension X.)
• Applicable shaft types: S, W



(mm)			
Size	X	L1 max	Q1
10	9 to 18	X - 4	M5
15	10 to 20	X - 4	M6

Symbol: **A4**


The short shaft can be further shortened by machining male threads into it.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
• Applicable shaft type: W



(mm)			
Size	Y	L2 max	Q2
10	7 to 9	Y - 2	M5
15	8 to 10	Y - 3	M6

Symbol: **A5**


The long shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension X.)
(If not specifying dimension C1, indicate "*" instead.)
• Applicable shaft types: S, W
• Equal dimensions are indicated by the same marker.



(mm)			
Size	X	L1 max	D1
10	3 to 18	X - 2	ø3.5 to ø4.9
15	3 to 20	X - 2	ø3.5 to ø5.9

Symbol: **A6**


The short shaft can be further shortened by machining it into a stepped round shaft.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)
• Applicable shaft type: W
• Equal dimensions are indicated by the same marker.



(mm)			
Size	Y	L2 max	D2
10	1 to 9	Y	ø3.5 to ø4.9
15	1 to 10	Y	ø3.5 to ø5.9

Symbol: **A7**


The long shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension X.)
(If not specifying dimension C1, indicate "*" instead.)
• Applicable shaft types: S, W



(mm)			
Size	X	L1 max	Q1
10	8 to 18	X - 2	M3, M4
15	9.5 to 20	X - 2	M3, M4, M5

Symbol: **A8**

The short shaft can be further shortened by machining it into a stepped round shaft with male threads.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)
• Applicable shaft type: W



(mm)			
Size	Y	L2 max	Q2
10	6 to 9	Y	M3, M4
15	7.5 to 10	Y	M3, M4, M5

- CRB2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2
- MSQ
- MSZ
- CRQ2X MSQX
- MRQ

D-□

CRQ2 Series (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA1 to -XA24: Shaft Pattern Sequencing I

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter.)
Please contact SMC for a specification sheet when placing an order.

Shaft Pattern Sequencing I


Additional Reminders

- Enter the dimensions within a range that allows for additional machining.
- Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
- The length of the unthreaded portion is 2 to 3 pitches.
- Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
- Enter the desired figures in the portion of the diagram.
- XA9 to XA24 are the standard products that have been additionally machined.
- Chamfer face of the parts machining additionally is C0.5.

Symbol: A9

The long shaft can be further shortened by changing the length of the standard chamfer on the long shaft side. (If shortening the shaft is not required, indicate "*" for dimension X.)

- Applicable shaft types: S, W




Size	X	L1
10	8 to 18	$(10 - (18 - X))$ to $(X - 2)$
15	10 to 20	$(10 - (20 - X))$ to $(X - 2)$

Symbol: A10

The short shaft can be further shortened by changing the length of the standard chamfer. (If shortening the shaft is not required, indicate "*" for dimension Y.)

- Applicable shaft type: W



Size	Y	L2
10	3 to 9	$6 - (9 - Y)$ to Y
15	3 to 10	$7 - (10 - Y)$ to Y


Symbol: A11

The long shaft can be further shortened by machining a double-sided chamfer on it.

- Since L1 is a standard chamfer, dimension E1 is 0.5 or more.

(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L1 and X dimensions.)

- Applicable shaft types: S, W



Size	X	L1	L3 max
10	8 to 18	$(10 - (18 - X))$ to $(X - 2)$	$X - 2$
15	10 to 20	$(10 - (20 - X))$ to $(X - 2)$	$X - 2$


Symbol: A12

The short shaft can be further shortened by machining a double-sided chamfer on it.

- Since L2 is a standard chamfer, dimension E2 is 0.5 or more.

(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L2 and Y dimensions.)

- Applicable shaft type: W




Size	Y	L2	L4 max
10	3 to 9	$6 - (9 - Y)$ to Y	Y
15	3 to 10	$7 - (10 - Y)$ to Y	Y

Symbol: A13

Shaft with through-hole
Minimum machining diameter for d1 is 0.1.

- Applicable shaft types: S, W




Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7

Symbol: A14

A special end is machined onto the long shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L1 is, as a rule, twice the thread size.

- (Example) For M3: L1 = 6
- Applicable shaft types: S, W




Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	ø3.3	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: A15

A special end is machined onto the short shaft, and a through-hole is drilled into it. Female threads are machined into the through-hole, whose diameter is equivalent to the pilot hole diameter.

- The maximum dimension L2 is, as a rule, twice the thread size. (Example) For M4: L2 = 8

- Applicable shaft types: S, W




Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	—	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol: A16

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size. (Example) For M5: L1 = 10

- Applicable shaft types: S, W
- Equal dimensions are indicated by the same marker.




Size	10	15	20	30	40
Thread					
M3 x 0.5	ø2.5	ø2.5	ø2.5	—	—
M4 x 0.7	—	ø3.3	ø3.3	—	—
M5 x 0.8	—	—	—	ø4.2	ø4.2
M6 x 1	—	—	—	—	ø5

Symbol -XA9 to XA24

- CRB□2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2
- MSQ
- MSZ
- CRQ2X
- MSQX
- MRQ

Symbol: **A17**


Shorten the long shaft.
• Applicable shaft types: S, W



Size	X (mm)
10	2 to 18
15	2 to 20
20	17 to 30
30	18 to 32
40	18.5 to 36

Symbol: **A18**


Shorten the short shaft.
• Applicable shaft type: W



Size	Y (mm)
10	1 to 9
15	1 to 10
20	1 to 15
30	1 to 18
40	1 to 20

Symbol: **A19**


Both the long shaft and short shaft are shortened.
• Applicable shaft type: W



Size	X (mm)	Y (mm)
10	2 to 18	1 to 9
15	2 to 20	1 to 10
20	17 to 30	1 to 15
30	18 to 32	1 to 18
40	18.5 to 36	1 to 20

Symbol: **A20**


Reverse the assembly of the shaft. (Thus shortening the long end and the short end of the shaft.)
(If shortening the shaft is not required, indicate "*" for dimension X and Y.)
• Applicable shaft types: S, W



Size	X (mm)	Y (mm)
10	2 to 10	1 to 17
15	2 to 11	1 to 19
20	2.5 to 16.5	16 to 28.5
30	3 to 20	16 to 30
40	3 to 22	16.5 to 34

Symbol: **A21**


The long shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
(If shortening the shaft is not required, indicate "*" for dimension X.) (If not specifying dimension C1, indicate "*" instead.)
• Applicable shaft types: S, W
• Equal dimensions are indicated by the same marker.



Size	X	L1 max	L3	D1
10	5 to 18	X - 3.5	L1 + 1.5	ø3.5 to ø4.9
15	5.5 to 18	X - 4	L1 + 2	ø3.5 to ø5.9

Symbol: **A22**


The short shaft can be further shortened by machining it into a stepped round shaft with a double-sided chamfer.
(If shortening the shaft is not required, indicate "*" for dimension Y.)
(If not specifying dimension C2, indicate "*" instead.)
Depending on the change that has been made, the flat portion of the standard product may remain.



Size	Y	L2 max	L4	D2
10	3 to 9	Y - 1.5	L1 + 1.5	ø3.5 to ø4.9
15	3.5 to 10	Y - 2	L1 + 2	ø3.5 to ø5.9

Symbol: **A23**


The long shaft can be further shortened by machining right-angle double-sided chamfer onto it.
• Since L1 is a standard chamfer, dimension E1 is 0.5 or more.
(If altering the standard chamfer and shortening the shaft are not required, indicate "*" for both the L1 and X dimensions.)
• Applicable shaft types: S, W



Size	X	L1	L3 max
10	8 to 18	{10 - (18 - X)} to {X - 2}	X - 2
15	10 to 20	{10 - (20 - X)} to {X - 2}	X - 2

Symbol: **A24**

Double key
Keys and keyways are machined at 180° from the standard position.
• Applicable shaft types: S, W
• Equal dimensions are indicated by the same marker.



Size	Key dimensions	LL
20	4 x 4 x 20	3
30	4 x 4 x 20	4
40	5 x 5 x 25	5

D-□

CRQ2 Series (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA31 to -XA59: Shaft Pattern Sequencing II

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter.)
Please contact SMC for a specification sheet when placing an order.

Shaft Pattern Sequencing II

Applicable shaft type: X, Y, Z, T, J and K

How to Order



Built-in magnet

Nil	None
D	Built-in magnet

Shaft type

X	Single shaft with four chamfers
Y	Double shaft key
Z	Double shaft with four chamfers
T	Single round shaft
J	Double shaft
K	Double round shaft

* Refer to pages 243 and 244 for the shaft type variations.

Size

10
15
20
30
40

Auto switch

Refer to page 235 for "How to Order" products with auto switches.

Air cushion

Size	Air cushion	
	None	Attached
10, 15	Nil	—
20, 30, 40	—	C

Rotating angle

90	80° to 100°
180	170° to 190°
360	350° to 370°

Symbol for simple specials, Made-to-Order products

- When number of combinations is 1 or 2, refer to chart 3 and 4.
- * Combination of XA is possible for up to 2 types.
- * Combination of -X6 (shaft, parallel key stainless spec) is available for all the types.

Combination 3 Types

A33	A34	C30
A34	A37	-X6
A35	C30	C69
A40	C8	-X6

Combination of Applicable Chart

Chart 3, 4
Chart 3
Chart 4, 5
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

Combination 4 Types

A33	A34	C30	C69
A34	A37	C12	-X6
A43	C12	C30	-X6

Combination of Applicable Chart

Chart 3, 4, 5
Chart 3, 4
Chart 4, 5

Combination is available only when all the conditions are fulfilled among the nation chart above.

* Combination of simple specials and Made-to-Order, it is possible for up to 4 types.

Pattern

How to order model with auto switches

Refer to page 235 for "How to Order" products with auto switches.

Thread type

Size	Port type	
10, 15	Nil	M5
20, 30, 40	Nil	Rc 1/8
	TF	G 1/8
	TN	NPT 1/8
	TT	NPTF 1/8

Symbol

-XA31 to XA59

Combination Chart of Simple Specials for Tip End Shape

Chart 3. Combination between -XA□ and -XA□ (X, Y, Z, T, J, K shafts)

Symbol	Description	Top port		Shaft type						Applicable size	Combination																					
		Upper	Lower	J	K	T	X	Y	Z		XA31	YA*	XA32	KA	TA*	XA33	XA34	XA	YA*	ZA*	XA35	XA36	XA37	XA38	XA39	XA40	XA41	XA45	XA46			
XA31	Female thread at the end	●	—	—	—	—	—	●	—	20, 30, 40	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
XA32	Female thread at the end	—	●	—	—	—	—	—	●	—	20, 30, 40	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
XA33	Female thread at the end	●	—	●	●	●	—	—	—	—	10, 15, 20, 30, 40	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
XA34	Female thread at the end	—	●	—	●	●	—	—	—	—	20, 30, 40	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
XA35	Female thread at the end	●	—	—	—	—	—	—	●	—	20, 30, 40	—	—	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—
XA36	Female thread at the end	—	●	—	—	—	—	—	—	●	—	20, 30, 40	—	—	—	—	—	—	—	—	●	—	—	—	—	—	—	—	—	—	—	—
XA37	Stepped round shaft	●	—	●	●	●	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA38	Stepped round shaft	—	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA39	Shaft through hole	●	—	—	—	—	—	—	●	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA40	Shaft through hole	●	●	—	—	—	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA41	Shaft through hole	●	●	●	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA42	Shaft through hole and female thread	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA43	Shaft through hole and female thread	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA44	Shaft through hole and female thread	●	●	—	—	—	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA45	Middle-cut chamfer	●	—	●	●	●	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA46	Middle-cut chamfer	—	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA48	Change of long shaft length	●	—	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA49	Change of short shaft length	—	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA50	Change of double shaft length	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA51	Change of long shaft length	●	—	●	●	●	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA52	Change of short shaft length	—	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA53	Change of double shaft length	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA54	Change of long shaft length	●	—	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA55	Change of short shaft length	—	●	●	—	—	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA56	Change of double shaft length	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA57	Change of double shaft length	●	●	—	—	—	—	—	—	—	10, 15, 20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA58	Reversed shaft, Change of double shaft length	●	●	●	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
XA59	Reversed shaft, Change of double shaft length	●	●	—	—	—	—	—	—	—	20, 30, 40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Combination Chart of Made to Order

Chart 4. Combination between -XA□ and -XC□ (Made to Order/Details of -XC□, refer to page 256.)

Symbol	Description	Applicable size	Combination XA31 to XA59
XC 7	Reversed shaft		—
XC 8	Change of rotating range	10, 15, 20, 30, 40	●
XC 9			●
XC10			●
XC11			●
XC12			●
XC13			●
XC14			●
XC15			●
XC16			●
XC17	Change in angle adjustable range 90° to 190°	20, 30, 40	●
XC18			●
XC19			●
XC20	Change of rotating range	20, 30, 40	●
XC21			●
XC22	Without inner rubber bumper	10, 15	●
XC30	Fluorine grease	10, 15, 20, 30, 40	●
XC69	Fluororubber seal	10, 15, 20, 30, 40	●

* Chart 5. Refer to page 256 for combination available between -XC□ and -XC□.

- CRB□2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2
- MSQ
- MSZ
- CRQ2X MSQX
- MRQ

D-□

CRQ2 Series (Size: 10, 15, 20, 30, 40)

Simple Specials:

-XA31 to -XA59: Shaft Pattern Sequencing II

Shaft pattern sequencing is dealt with a simple made-to-order system. (Refer to front matter.)
Please contact SMC for a specification sheet when placing an order.


Shaft Pattern Sequencing II

Additional Reminders

1. Enter the dimensions within a range that allows for additional machining.
2. Unless indicated otherwise, the dimensional tolerance conforms to the general tolerance. SMC will make appropriate arrangements.
3. The length of the unthreaded portion is 2 to 3 pitches.
4. Unless specified otherwise, the thread pitch is based on coarse metric threads.
M3 x 0.5, M4 x 0.7, M5 x 0.8
M6 x 1
5. Enter the desired figures in the [] portion of the diagram.
6. XA31 to XA59 are the standard products that have been additionally machined.
7. Chamfer face of the parts machining additionally is C0.5.

Symbol: A31


Machine female threads into the long shaft.
• The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
• Applicable shaft type: Y



Size	Q1
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A32


Machine female threads into the short shaft.
• The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M4: L2 = 8
• Applicable shaft type: Y



Size	Q2
20	M3, M4
30	M3, M4, M5
40	M4, M5, M6

Symbol: A33


Machine female threads into the long shaft.
• The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
• Applicable shaft types: J, K, T



Size	Q1
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A34


Machine female threads into the short shaft.
• The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M5: L2 = 10
• Applicable shaft types: K, T, X



Size	Q2
10	M3
15	M3, M4
20	M3, M4, M5, M6
30	M4, M5, M6, M8
40	M4, M5, M6, M8, M10

Symbol: A35


Machine female threads into the long shaft.
• The maximum dimension L1 is, as a rule, twice the thread size.
(Example) For M3: L1 = 6
• Applicable shaft types: X, Z



Size	Q1
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A36


Machine female threads into the short shaft.
• The maximum dimension L2 is, as a rule, twice the thread size.
(Example) For M4: L2 = 8
• Applicable shaft types: J, Z



Size	Q2
20	M3, M4
30	M3, M4, M5, M6
40	M4, M5, M6, M8

Symbol: A37


The long shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "∞" for dimension X.) (If not specifying dimension C1, indicate "∞" instead.)
• Applicable shaft types: J, K, T
• Equal dimensions are indicated by the same marker.



Size	X	L1 max	D1
10	3 to 18	X-2	ø3.5 to ø4.9
15	3 to 20	X-2	ø3.5 to ø5.9
20	3.5 to 30	X-2.5	ø5 to ø9.9
30	4 to 32	X-3	ø5 to ø11.9
40	4 to 36	X-3	ø5 to ø14.9

Symbol: A38

The short shaft can be further shortened by machining it into a stepped round shaft. (If shortening the shaft is not required, indicate "∞" for dimension Y.) (If not specifying dimension C2, indicate "∞" instead.)
• Applicable shaft type: C2
• Equal dimensions are indicated by the same marker.




Size	Y	L2 max	D2
10	1 to 18	Y	ø3.5 to ø4.9
15	1 to 20	Y	ø3.5 to ø5.9
20	1 to 30	Y	ø5 to ø9.9
30	1 to 32	Y	ø5 to ø11.9
40	1 to 36	Y	ø5 to ø14.9

Symbol

-XA31 to XA48

Symbol: A39


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft type: Y



Size	d1
20	ø2.5 to ø3.5
30	ø3 to ø5.5
40	ø4 to ø7

Symbol: A40


Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: K, T



Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø6
30	ø3 to ø8
40	ø4 to ø10

Symbol: A41

Shaft with through-hole
Minimum machining diameter for d1 is 0.1.
• Applicable shaft types: J, X, Z




Size	d1
10	ø2 to ø3
15	ø2 to ø4
20	ø2.5 to ø5
30	ø3 to ø7
40	ø4 to ø8

Symbol: A42

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft type: Y
- Equal dimensions are indicated by the same marker.




Size	20	30	40
Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8
Q1	ø2.5	ø3.3	ø4.2
L1 max	—	—	—

Symbol: A43

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft types: K, T
- Equal dimensions are indicated by the same marker.




Size	10	15	20	30	40
Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1	M8 x 1.25
Q1	ø2.5	ø3.3	ø4.2	ø5	ø6.8
L1 max	—	—	—	—	—

Symbol: A44

A special end is machined onto both the long and short shafts, and a through-hole is drilled into both shafts. Female threads are machined into the through-holes, whose diameter is equivalent to the diameter of the pilot holes.

- The maximum dimension L1 is, as a rule, twice the thread size.
- Applicable shaft types: J, X, Z
- Equal dimensions are indicated by the same marker.




Size	10	15	20	30	40
Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1	M8 x 1.25
Q1	ø2.5	ø3.3	ø4.2	ø5	ø6.8
L1 max	—	—	—	—	—

Symbol: A45

The long shaft can be further shortened by machining a middle-cut chamfer into it.
(If shortening the shaft is not required, indicate "s" for dimension X.)
(The position is that of the standard flat at the keyway portion.)

- Applicable shaft types: J, K, T




Size	X	W1	L1 max	L3 max
10	6 to 18	0.5 to 1.5	X-2	L1-1
15	6.5 to 20	0.5 to 1.5	X-2	L1-1
20	9.5 to 30	1 to 2	X-2.5	L1-2
30	11.5 to 32	1 to 2	X-3	L1-2
40	12.5 to 36	1 to 2	X-3	L1-2

Symbol: A46

The short shaft can be further shortened by machining a middle-cut chamfer into it.
(If shortening the shaft is not required, indicate "s" for dimension Y.)
(The position is that of the standard flat at the keyway portion.)


- Applicable shaft type: K



Size	Y	W2	L2 max	L4 max
10	4 to 18	0.5 to 1.5	Y	L2-1
15	4.5 to 20	0.5 to 1.5	Y	L2-1
20	6.5 to 30	1 to 2	Y	L2-2
30	8.5 to 32	1 to 2	Y	L2-2
40	9.5 to 36	1 to 2	Y	L2-2

Symbol: A48

Shorten the long shaft.
• Applicable shaft type: Y



Size	X
20	17 to 30
30	18 to 32
40	18.5 to 36

CRB2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ










MSZ

CRQ2X
MSQX

MRQ

D-□

Shaft Pattern Sequencing II

<p>Symbol: A49</p> <p>Shorten the short shaft. • Applicable shaft type: Y</p>  <p>Long shaft side</p> <p>Short shaft side</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>17 to 30</td> </tr> <tr> <td>30</td> <td>18 to 32</td> </tr> <tr> <td>40</td> <td>18.5 to 36</td> </tr> </tbody> </table>	Size	Y	20	17 to 30	30	18 to 32	40	18.5 to 36	<p>Symbol: A50</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: Y</p>  <p>Long shaft side</p> <p>Short shaft side</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>17 to 30</td> <td>17 to 30</td> </tr> <tr> <td>30</td> <td>18 to 32</td> <td>18 to 32</td> </tr> <tr> <td>40</td> <td>18.5 to 36</td> <td>18.5 to 36</td> </tr> </tbody> </table>	Size	X	Y	20	17 to 30	17 to 30	30	18 to 32	18 to 32	40	18.5 to 36	18.5 to 36	<p>Symbol: A51</p> <p>Shorten the long shaft. • Applicable shaft types: J, K, T</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>Size 10, 15</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> </tr> <tr> <td>15</td> <td>3 to 20</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> </tr> <tr> <td>30</td> <td>4 to 32</td> </tr> <tr> <td>40</td> <td>4 to 36</td> </tr> </tbody> </table>	Size	X	10	3 to 18	15	3 to 20	20	3.5 to 30	30	4 to 32	40	4 to 36										
Size	Y																																											
20	17 to 30																																											
30	18 to 32																																											
40	18.5 to 36																																											
Size	X	Y																																										
20	17 to 30	17 to 30																																										
30	18 to 32	18 to 32																																										
40	18.5 to 36	18.5 to 36																																										
Size	X																																											
10	3 to 18																																											
15	3 to 20																																											
20	3.5 to 30																																											
30	4 to 32																																											
40	4 to 36																																											
<p>Symbol: A52</p> <p>Shorten the short shaft. • Applicable shaft type: K</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>Size 10, 15</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>1 to 18</td> </tr> <tr> <td>15</td> <td>1 to 20</td> </tr> <tr> <td>20</td> <td>1 to 30</td> </tr> <tr> <td>30</td> <td>1 to 32</td> </tr> <tr> <td>40</td> <td>1 to 36</td> </tr> </tbody> </table>	Size	Y	10	1 to 18	15	1 to 20	20	1 to 30	30	1 to 32	40	1 to 36	<p>Symbol: A53</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: K</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>Size 10, 15</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> <td>1 to 18</td> </tr> <tr> <td>15</td> <td>3 to 20</td> <td>1 to 20</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> <td>1 to 30</td> </tr> <tr> <td>30</td> <td>4 to 32</td> <td>1 to 32</td> </tr> <tr> <td>40</td> <td>4 to 36</td> <td>1 to 36</td> </tr> </tbody> </table>	Size	X	Y	10	3 to 18	1 to 18	15	3 to 20	1 to 20	20	3.5 to 30	1 to 30	30	4 to 32	1 to 32	40	4 to 36	1 to 36	<p>Symbol: A54</p> <p>Shorten the long shaft. • Applicable shaft types: X, Z</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>X axis</p> <p>Z axis</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>3.5 to 21</td> </tr> <tr> <td>30</td> <td>4 to 24</td> </tr> <tr> <td>40</td> <td>4 to 27</td> </tr> </tbody> </table>	Size	X	20	3.5 to 21	30	4 to 24	40	4 to 27				
Size	Y																																											
10	1 to 18																																											
15	1 to 20																																											
20	1 to 30																																											
30	1 to 32																																											
40	1 to 36																																											
Size	X	Y																																										
10	3 to 18	1 to 18																																										
15	3 to 20	1 to 20																																										
20	3.5 to 30	1 to 30																																										
30	4 to 32	1 to 32																																										
40	4 to 36	1 to 36																																										
Size	X																																											
20	3.5 to 21																																											
30	4 to 24																																											
40	4 to 27																																											
<p>Symbol: A55</p> <p>Shorten the short shaft. • Applicable shaft type: J, Z</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>Size 10, 15</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>1 to 9</td> </tr> <tr> <td>15</td> <td>1 to 10</td> </tr> <tr> <td>20</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>1 to 20</td> </tr> </tbody> </table>	Size	Y	10	1 to 9	15	1 to 10	20	1 to 15	30	1 to 18	40	1 to 20	<p>Symbol: A56</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: Z</p>  <p>Long shaft side</p> <p>Short shaft side</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>3.5 to 21</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>4 to 24</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>4 to 27</td> <td>1 to 20</td> </tr> </tbody> </table>	Size	X	Y	20	3.5 to 21	1 to 15	30	4 to 24	1 to 18	40	4 to 27	1 to 20	<p>Symbol: A57</p> <p>Both the long shaft and short shaft are shortened. • Applicable shaft type: J</p>  <p>Long shaft side</p> <p>Long shaft side</p> <p>Short shaft side</p> <p>Short shaft side</p> <p>Size 10, 15</p> <p>Size 20, 30, 40</p> <p>(mm)</p> <table border="1"> <thead> <tr> <th>Size</th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>3 to 18</td> <td>1 to 9</td> </tr> <tr> <td>15</td> <td>3 to 20</td> <td>1 to 10</td> </tr> <tr> <td>20</td> <td>3.5 to 30</td> <td>1 to 15</td> </tr> <tr> <td>30</td> <td>4 to 32</td> <td>1 to 18</td> </tr> <tr> <td>40</td> <td>4 to 36</td> <td>1 to 20</td> </tr> </tbody> </table>	Size	X	Y	10	3 to 18	1 to 9	15	3 to 20	1 to 10	20	3.5 to 30	1 to 15	30	4 to 32	1 to 18	40	4 to 36	1 to 20
Size	Y																																											
10	1 to 9																																											
15	1 to 10																																											
20	1 to 15																																											
30	1 to 18																																											
40	1 to 20																																											
Size	X	Y																																										
20	3.5 to 21	1 to 15																																										
30	4 to 24	1 to 18																																										
40	4 to 27	1 to 20																																										
Size	X	Y																																										
10	3 to 18	1 to 9																																										
15	3 to 20	1 to 10																																										
20	3.5 to 30	1 to 15																																										
30	4 to 32	1 to 18																																										
40	4 to 36	1 to 20																																										

Symbol

-XA49 to XA59

CRB□2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X
MSQX

MRQ

Symbol: A58

The rotation axis is reversed, and then shorten the long and short shafts.

- Applicable shaft type: J, T

Size	X	Y
10	3 to 10	1 to 17
15	3 to 11	1 to 19
20	3.5 to 16.5	1 to 28.5
30	4 to 20	1 to 30
40	4 to 22	1 to 34

(mm)

Symbol: A59

The rotation axis is reversed, and then shorten the long shaft.

- Applicable shaft type: X

Size	Y
20	1 to 19.5
30	1 to 22
40	1 to 25

(mm)

D-□

CRQ2 Series Made to Order Specifications 1

Please contact SMC for detailed dimensions, specifications and lead times.



How to Order

C **D** **RQ2B** **S** **P** **20** **90** **M9BW** **X** **C7** **C12** **C30** **-X6**

Built-in magnet

Nil	None
D	Built-in magnet

Shaft type

Standard	Shaft type
S	Single shaft
W	Double shaft
X	Single shaft with four chamfers
Y	Double shaft key
Z	Double shaft with four chamfers
T	Single round shaft
J	Double shaft
K	Double round shaft

Size

10
15
20
30
40

Auto switch

Refer to page 235 for the part no. of auto switches.

Air cushion

Size	Air cushion	
	None	Attached
10, 15	Nil	—
20, 30, 40	Nil	—

Rotating angle

90	80° to 100°
180	170° to 190°
360	350° to 370°

Thread type

Size	Port type	
10, 15	Nil	M5
20, 30, 40	Nil	Rc 1/8
	TF	G 1/8
	TN	NPT 1/8
	TT	NPTF 1/8

Pattern

How to order model with auto switches

Refer to page 235 for "How to Order" products with auto switches.

Symbol for simple specials, Made-to-Order products

- When number of combinations is 1 or 2, refer to chart 2, 4 and 5.
- Combination of XA is possible for up to 2 types.
- Combination of -X6 (shaft, parallel key stainless spec.) is available for all the types.

Combination 3 Types

C7	C30	C69
C12	C22	-X6

Combination of Applicable Chart

Chart 5
Chart 5

Combination is available only when all the conditions are fulfilled among the combination chart above.

Combination 4 Types

C7	C12	C30	-X6
----	-----	-----	-----

Combination of Applicable Chart

Chart 5

Combination is available only when all the conditions are fulfilled among the combination chart above.

* Combination of Made-to-Order is available up to 4 types.

Combination Chart of Made to Order

Chart 5. Combination between -XC□ and -XC□

Symbol	Description	Applicable size	Combination			
XC7	Reversed shaft	10, 15, 20, 30, 40	●	●	●	●
XC8 to XC11	Change of rotating range					
XC12 to XC15	Change in angle adjustable range 0° to 100°					
XC16 to XC17	Change in angle adjustable range 90° to 190°					
XC18 to XC19	Change of rotating range					
XC20 to XC21	Change in angle adjustable range 90° to 190°	20, 30, 40	XC7 to XC17	XC18 to XC21	XC22	
XC22	Without inner rubber bumper	10, 15	●			
XC30	Fluorine grease	10, 15, 20, 30, 40	●	●	●	XC30
XC69	Fluororubber seal	10, 15, 20, 30, 40	●	●	●	●

1 Reversed Shaft

Symbol
-XC7


CRQ2B
CDRQ2B Refer to "How to Order" on page 235. —XC7

Reversed shaft


Specifications

Applicable size	10, 15, 20, 30, 40
Applicable shaft type	S, W, X, T, J shaft

- CRB□2
- CRB1
- MSU
- CRJ
- CRA1
- CRQ2**
- MSQ
- MSZ
- CRQ2X
MSQX
- MRQ

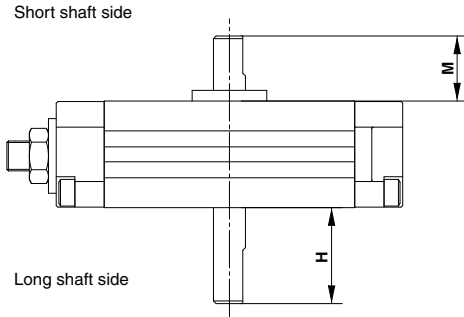

Size 10, 15

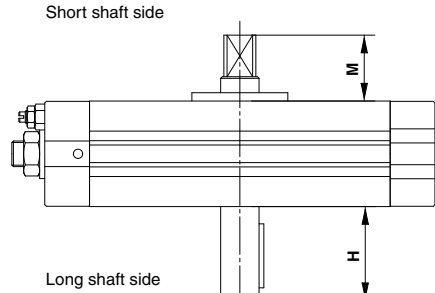

Size 20, 30, 40

Size	M	H
10	10	17 (—)*
15	11	19 (—)*
20	16.5	28.5 (19.5)*
30	20	30 (22)*
40	22	34 (25)*

(mm)

* For X shaft

D-□

CRQ2 Series

Made to Order Specifications 2

Please contact SMC for detailed dimensions, specifications and lead times.



2 Change of Rotating Range

Symbol

-XC8 to XC11, XC18/XC19

CRQ2B
CDRQ2B Refer to "How to Order" on page 235. —X C8







Specifications

Applicable shaft type S, W, Y

Symbol
-XC8 to XC11, XC18/XC19

Additional Reminders

The rotation starting point shows the positions of one flat chamfering and the key groove when pressurized to the connecting port (B).

<p>Symbol: C8</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (down).</p>  <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C9</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the horizontal line (left).</p>  <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C10</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $90^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (up).</p>  <p>The figure shows the view from the long shaft end.</p>								
<p>Symbol: C11</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the horizontal line (left).</p>  <p>The figure shows the view from the long shaft end.</p>	<p>Symbol: C18</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (down).</p>  <p>The figure shows the view from the long shaft end.</p> <table border="1" data-bbox="403 1276 492 1340"> <thead> <tr> <th>Operating size</th> </tr> </thead> <tbody> <tr> <td>20</td> </tr> <tr> <td>30</td> </tr> <tr> <td>40</td> </tr> </tbody> </table>	Operating size	20	30	40	<p>Symbol: C19</p> <p>Angle adjustment at the rotation starting point and the end point are at $\pm 5^\circ$. Rotating range is changed. Rotation angle is at $180^\circ \pm 10^\circ$. The rotation starting point is on the perpendicular line (up).</p>  <p>The figure shows the view from the long shaft end.</p> <table border="1" data-bbox="728 1276 817 1340"> <thead> <tr> <th>Operating size</th> </tr> </thead> <tbody> <tr> <td>20</td> </tr> <tr> <td>30</td> </tr> <tr> <td>40</td> </tr> </tbody> </table>	Operating size	20	30	40
Operating size										
20										
30										
40										
Operating size										
20										
30										
40										

3 Change of Angle Adjustable Range (0° to 100°, 90° to 190°)

Symbol
-XC12 to XC17, XC20/XC21

CRQ2B
CDRQ2B Refer to "How to Order" on page 235.

Symbol **C12**

-XC12 to XC17, XC20/XC21

Specifications

Applicable shaft type S, W, Y, X*, Z*, T*, J*, K*

Additional Reminders


The rotation starting point is the position of the flat and the key groove when the actuator is pressurized through connection port B.

There are no air cushion effects in the rotating ranges of 70° or 160° shown in the diagram.

* Only XC12 and XC16 are compatible with shaft types X, Z, T, J and K.

Symbol: **C12**


The rotation angle can be adjusted between 0° and 100°.



The figure shows the view from the long shaft end.

Symbol: **C13**


The rotation angle can be adjusted between 0° and 100°.



The figure shows the view from the long shaft end.

Symbol: **C14**


The rotation angle can be adjusted between 0° and 100°.



The figure shows the view from the long shaft end.

Symbol: **C15**


The rotation angle can be adjusted between 0° and 100°.



The figure shows the view from the long shaft end.

Symbol: **C16**


The rotation angle can be adjusted between 90° and 190°.



The figure shows the view from the long shaft end.

Symbol: **C17**


The rotation angle can be adjusted between 90° and 190°.



The figure shows the view from the long shaft end.

Symbol: **C20**


The rotation angle can be adjusted between 90° and 190°.



The figure shows the view from the long shaft end.

Symbol: **C21**

The rotation angle can be adjusted between 90° and 190°.



The figure shows the view from the long shaft end.

CRB□2

CRB1

MSU

CRJ

CRA1

CRQ2

MSQ

MSZ

CRQ2X

MSQX

MRQ

D-□

CRQ2 Series Made to Order Specifications 3

Please contact SMC for detailed dimensions, specifications and lead times.



4 Without Inner Rubber Bumper Symbol -XC22

C RQ2B Refer to "How to Order" on page 235. — XC22
CDRQ2B

Without inner rubber bumper

5 Fluorine Grease Symbol -XC30

C RQ2B Refer to "How to Order" on page 235. — XC30
CDRQ2B

Fluorine grease

Fluorine grease is used as lubricant oil in seal part of packing and inner wall of cylinder. (Not for low-speed specification.)

Specifications

Fluid	Air (Non-lube)
Applicable size	10, 15
Max. operating pressure	0.7 MPa
Min. operating pressure	0.15 MPa
Port size	M5 x 0.8
Rotation	80° to 100°, 170° to 190°, 350° to 370°
Applicable shaft type	S, W, X, Y, Z, T, J, K
Auto switch	Mountable

*Refer to page 236 for other specifications.

Refer to pages 239 and 240 for other specifications.

6 Fluororubber Seal Symbol -XC69

C RQ2B Refer to "How to Order" on page 235. — XC69
CDRQ2B

Fluororubber seal

Seal material is changed to fluororubber.

7 Shaft, Parallel Key Made of Stainless Steel Spec. Symbol -X6

C RQ2B Shaft type Size — Rotation S-X6
CDRQ2B

Refer to "How to Order" on page 235 for further information.

Shaft, parallel key made of stainless steel

Stainless steel is used as a substitute material for standard parts when used under conditions with a possibility of oxidation or decay.

Fluid	Air (Non-lube)
Applicable shaft type	S, W, X, Y, Z, T, J, K
Applicable size	20, 30, 40
Max. operating pressure	1.0 MPa
Min. operating pressure	0.1 MPa
Cushion	Not attached, Air cushion
Rotation range	80° to 100°, 170° to 190°, 350° to 370°
Stainless steel part	Shaft, Parallel key
Port size	Rc 1/8, G 1/8, NPT 1/8, NPTF 1/8
Auto switch	Mountable